


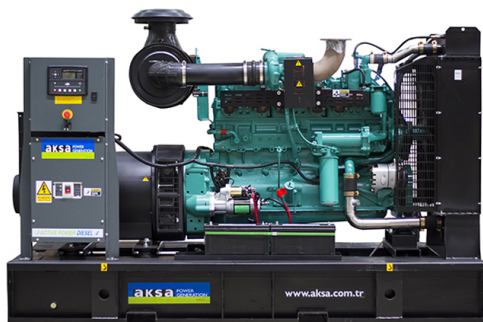

Einführung

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

Leistung

3 Phase, 50 Hz, PF 0.8

Spannung (V)	Bereitschaftsleistung (ESP)		Primärleistung		Standby-Strom
	kW	kVA	kW	kVA	
400 / 231	280,0	350	240.0	300	505

„STANDBY-RATING (ESP) Gilt für die Stromversorgung wechselnder elektrischer Lasten für die Dauer einer Stromunterbrechung einer zuverlässigen Versorgungsquelle. ESP entspricht ISO 8528-1. Überlast ist nicht erlaubt.“

PRIME RATING (PRP) Gilt für die Stromversorgung unterschiedlicher elektrischer Lasten für unbegrenzte Stunden. PRP entspricht ISO 8528-1. 10 % Überlast ist für einen Zeitraum von 1 Stunde innerhalb eines 12-stündigen Betriebszeitraums verfügbar.

Allgemeine Charakteristiken

Modellname	AC 350
Frequenz (Hz)	50
Treibstoffart	Diesel
Motor Marke und Modell	Cummins QSL9-G5
Marke und Modell des Generators	Aksa AK 5240
Steuerung Modell	DSE 7320
Schalldämmhaube	MS 60

Motorspezifikationen

Allgemeine Daten

Hersteller	Cummins
Motor Modell	QSL9-G5
Anzahl der Zylinder	6 cylinders - in line
Bohrung (mm)	114



Hub (mm.)	145
Hubraum (lt.)	8.8
Kompressionsrate	16.8:1
Motorumdrehungen (U/min)	1500
Standby-Leistung (kW/PS)	310/415
Prime Leistung (kW/PS)	268/359
Kühlwasservorwärmung Anzahl	1
Kühlwasservorwärmung (Watt)	3000
Drehzahlregelung	ECM
Luftfilter	Dry Type
Ansaugung	Turbo Charged and Charge Air Cooled

Schmiersystem

Ölkapazität (lt)	26.5
Max. Öltemperatur (°C)	121

Kraftstoffsystem

Treibstoffart	Diesel
Injektionsart und -system	Direct
Typ der Kraftstoffpumpe	HPCR (High Pressure Common Rail)

Elektrisches System

Betriebsspannung (Vdc)	24 Vdc
Batterie und Kapazität (Menge/Ah)	2x85
Lichtmaschine	70

Kühlsystem

Kühlungsmethode	Water Cooled
	11/28.6

Abgassystem

Abgasstrom (m³/min.)	31.2
Abgasgegendruck (kPa)	76
Abgastemp. (C)	560
Wärmeabgabe an das Abgas	240

Kühler

Luftstrom des Kühlgebläses (m³/min.)	475
--------------------------------------	-----

Kraftstoffverbrauch

Der Hersteller behält sich das Recht vor, ohne vorherige Ankündigung Änderungen an Modell, technischen Spezifikationen, Farbe, Ausstattung und Zubehör vorzunehmen.

04/08/2026



Kraftstoffverbrauch Prime mit 100 % Leistung (l/h)	63
Kraftstoffverbrauch Prime mit 75 % Leistung (l/h)	46
Kraftstoffverbrauch Prime mit 50 % Leistung (l/h)	31

Eigenschaften des Generators

Hersteller	Aksa
Generatormodell	AK 5240
Frequenz (Hz)	50
Leistung (kVA)	300
Spannung (V)	400
Phase	3
Regler	SX440
Spannungsregulierung	1
Isoliersystem	H
Schutz	IP22
Nennleistungsfaktor	0.8
Gewicht kompletter Generator (kg)	940
Kühlungsluft (m³/min)	29.16

Abmessungen des offenen Aggregates

Länge (mm)	2750
Breite (mm)	1300
Höhe (mm)	1939
	2665
Tankinhalt (lt.)	470

Eigenschaften der Schalldämmhaube

Länge (mm)	3934
Breite (mm)	1356
Höhe (mm)	2156
Trockengewicht (kg.)	3485
Tankinhalt (lt.)	470

Steuerung

Hersteller	DSE
Steuerungsmodul Modell	DSE 7320
Kommunikationsanschlüsse	MODBUS

Der Hersteller behält sich das Recht vor, ohne vorherige Ankündigung Änderungen an Modell, technischen Spezifikationen, Farbe, Ausstattung und Zubehör vorzunehmen.

04/08/2026



1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

Standardgeräte

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions
Static battery charger, Fuses for control circuits

Steuergerät

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Bau und Fertigstellung

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

Installation

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

Motor

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

Abschaltung

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation

Warnungen

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal

Generator

Warnung

Elektrische Auslösung

Der Hersteller behält sich das Recht vor, ohne vorherige Ankündigung Änderungen an Modell, technischen Spezifikationen, Farbe, Ausstattung und Zubehör vorzunehmen.

04/08/2026



- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVA_r
- kWh, kVAh, kVA_rh
- Phasesequence

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Netz

- Voltage (L-L, L-N)
- Frequency

Erweiterungen

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

Optionen

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

Compliance-Liste des Control Panels

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

Statisches Batterieladegerät

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

Standard Ausrüstung

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger
- Manual for application and installation



Optionale Ausrüstung

Motor

- Fuel-Water Separator Filter
- Oil heater

Steuerung

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

Zusatzausrüstung

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

Gehäuse

- Galvanized Coating
- ISO Container
- Marine Grade Paint

Generator

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

Transferpanel

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

Auspuff

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

Optionales Generatorsteuerfeld

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

Aksa-Zertifikate

Richtlinie

- 2006/42/EC : Machinery Safety Directive
- 2014/30/EU : Electromagnetic Compatibility Directive
- 2014/35/EU : Low Voltage Directive

Standards

- TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating current generating sets- Part:13: Safety

Quality Management Systems
ISO 9001:2015



ISO 14001:2015
ISO 45001:2018
ISO 50001:2018
ISO 27001:2013
ISO 10002:2018