


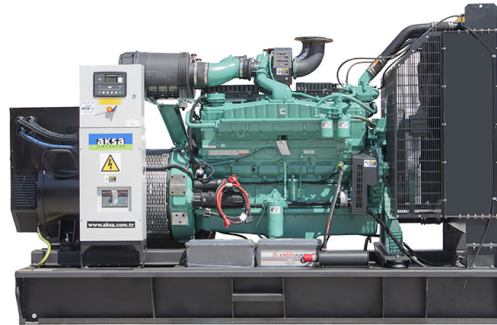

مقدمة

Aksa is committed to providing the most effective solution to the Data Center industry with the power it takes from engineering, production, distribution, and customer-oriented experience and knowledge. We are constantly improving designs, products and infrastructure to offer the highest level of reliability for Emergency Power Systems. While serving the industry in hundreds of countries Globally, we design our products and systems in line with the needs of Data Center practitioners at the center of our focus. Aksa generator group provides continuity, reliability and ideal performance for Data Centers.

القوة

3 Phase, 50 Hz, PF 0.8

الجهد (فولت)	الطاقة الاحتياطية (ESP)		تصنيف DCC (DCP)		DCC تيار (أ)
	kW	kVA	kW	kVA	
400 / 231	704,7	880,9	642.96	803.7	1272

مركز البيانات المستمر (DCC) أقصى قدرة يمكن لمجموعة توليد توفيرها أثناء توفير تيار كهربائي متغير أو مستمر وخلال ساعات تشغيل غير محدودة. يعتمد ذلك على المواقع التي يتعين تزويدها وتوفر الخدمات العامة.

الواردة DCC، كما هو مفصل في معايير معهد الوقت التشغيل: الهيكل. تم التعرف على تصنيفات الطاقة للبيانات الاحتياطية و IV و III تلي تصنيفات الطاقة لمركز البيانات المستمر، كما هو محدد، متطلبات معهد الوقت التشغيل المستوى DCC: "أعلاه، وفقاً لظروف الضغط الجوي بمعدل 100 كيلوباسكال (ارتفاع 110 متراً) ودرجة حرارة الجو بمعدل 25 درجة مئوية. * نسبة التسامح للبيانات -5 %".

الخصائص العامة

اسم الموديل	AC 880
التردد (هرتز)	50
نوع الوقود	Diesel
نوع المحرك وطرازه	Cummins QSK23-G3 (For DCCP)
نوع المولد والموديل	Stamford S6L1D-C4 Wdg.311/312 (For DCCP)
نموذج لوحة التحكم	DSE 7320
هيكل	OpenGenset

مواصفات المحرك

بيانات عامة

المصنع	Cummins
نوع المحرك	QSK23-G3 (For DCCP)
عدد الاسطوانات	6 cylinders - in line



تتحمل (مم)	170
السكتة الدماغية (مم)	170
النزوح (لتر)	23.15
نسبة الضغط	16.0 : 1
سرعة المحرك (دورة في الدقيقة)	1500
الطاقة الاحتياطية (كيلوواط/حصان)	768/1030
DCC (PRP) تصنيف	701/940
كتلة سخان الكمية	1
قوة سخان الكتلة (وات)	3000
نظام التحكم	Electronic
مرشح الهواء	Dry Type
طموح	Turbo Charged and Charge Air Cooled

نظام تشحيم

سعة الزيت (لتر)	103
الحد الأعلى لدرجة حرارة الزيت (درجة مئوية)	120

نظام الوقود

نوع الوقود	Diesel
نوع ونظام الحقن	Direct Injection
نوع مضخة الوقود	Cummins HPI-PT

النظام الكهربائي

جهد التشغيل	24 Vdc
البطارية والسعة (الكمية/أه)	2x143
مولد الشحن (أمبير)	35

نظام التبريد

طريقة التبريد	Air Cooled
	46,5

نظام العادم

تدفق الغازات الناتجة (متر مكعب/دقيقة)	135,5
درجة حرارة العادم (°C)	532
رفض الحرارة للعادم (كيلوواط)	507

المبرد

تدفق هواء مروحة التبريد (م³/دقيقة)	822
(Pa) القيود الخارجية على تدفق هواء التبريد	120



استهلاك الوقود

كجم/س (ل/س) DCC استهلاك الوقود @100% حمولة	161
كجم/س (ل/س) DCC استهلاك الوقود @75% حمولة	121
كجم/س (ل/س) DCC استهلاك الوقود @50% حمولة	85

خصائص المولد

المصنع	Stamford
موديل المولد	S6L1D-C4 Wdg.311/312 (For DCCP)
التردد (هرتز)	50
القوة (كيلوفولت أمبير)	810
الجهد (فولت)	400
المرحلة	3
منظم	MX341
تنظيم الجهد	1
نظام العزل	H
الحماية	IP23
معامل القوة المقدرة	0,8
وزن المولد الكامل (كيلوغرام)	1897
فترة زيادة الحرارة	H
هواء التبريد (م ³ /دقيقة)	87.6

أبعاد المولد (مفتوح)

الطول (مم)	4000
العرض (مم)	1710
الارتفاع (مم)	2270
سعة الخزان (لتر)	1500


لوحة التحكم

المصنع	DSE
نموذج وحدة التحكم	DSE 7320
منافذ الاتصال	MODBUS

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's



7. Operation selecting buttons

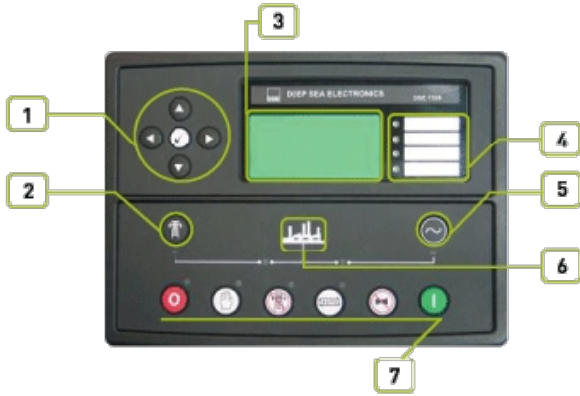

الأجهزة القياسية

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions
Static battery charger, Fuses for control circuits

وحدة التحكم

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

البناء والتشطيب

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

تركيب

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

محرك

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

إيقاف

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation

تحذيرات

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal

مولد

الإنذارات المسبقة

الإطفاء الكهربائي



- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phasesequence

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

أنابيب

- Voltage (L-L, L-N)
- Frequency

التوسعات

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

خيارات

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

قائمة الامتثال للوحة التحكم

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

شاحن بطارية ثابت

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

المعدات القياسية

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Roof top mounted Industrial exhaust silencer
- Static battery charger
- Manual for application and installation



معدات اختيارية

محرك

- Fuel-Water Separator Filter
- Oil heater
- Air filter

لوحة التحكم

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

المعدات المساعدة

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

غطاء المولد

- Galvanized Coating
- ISO Container
- Marine Grade Paint

المولد

- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker
- 5% derate when air inlet filters are fitted

لوحة النقل

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

عام

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

لوحة التحكم البديلة للمولد

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

شهادات الشركة

التوجيه

2006/42/EC : Machinery Safety Directive -
2014/30/EU : Electromagnetic Compatibility Directive -
2014/35/EU : Low Voltage Directive -

المعايير

TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating - current generating sets- Part:13: Safety

Quality Management Systems
ISO 9001:2015



ISO 14001:2015
ISO 45001:2018
ISO 50001:2018
ISO 27001:2013
ISO 10002:2018