


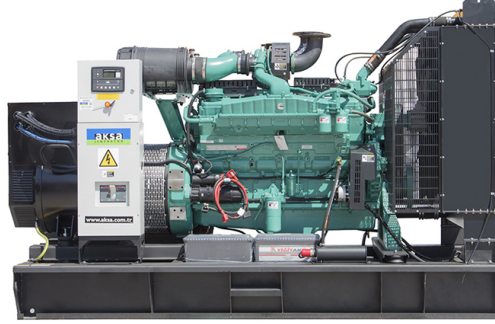

Ürün Hakkında

Aksa is committed to providing the most effective solution to the Data Center industry with the power it takes from engineering, production, distribution, and customer-oriented experience and knowledge. We are constantly improving designs, products and infrastructure to offer the highest level of reliability for Emergency Power Systems. While serving the industry in hundreds of countries Globally, we design our products and systems in line with the needs of Data Center practitioners at the center of our focus. Aksa generator group provides continuity, reliability and ideal performance for Data Centers.

Güç

3 Phase, 50 Hz, PF 0.8

Voltaj (V)	STANDBY GÜÇ(ESP)		DCC GÜÇ (DCP)		DCC AKIM(A)
	kW	kVA	kW	kVA	
400 / 231	704,7	880,9	642.96	803.7	1272

Standby Güç (ESP) : Güvenilir şebeke kaynağının kesilmesi durumunda, değişken elektrik yük ihtiyacının karşılanmasında kullanılır. ESP, ISO 8528-1'e uygundur Aşırı yüklemeye izin verilmemiştir.

Data Center Continuous (DCP) : Veri merkezi gücü, bir jeneratör setinin değişken veya sürekli bir elektrik yükünü beslerken ve sınırsız çalışma saatleri boyunca sağlayabileceği maksimum güç olarak tanımlanır.

*Veri toleransı $\pm 5\%$

Genel Özellikler

Model Adı	AC 880
Frekans (Hz)	50
Yakıt Tipi	Diesel
Motor Marka ve Modeli	Cummins QSK23-G3 (For DCCP)
Alternatör Marka ve Modeli	Stamford S6L1D-C4 Wdg.311/312 (For DCCP)
Kontrol Panel Modeli	DSE 7320
Kabin Modeli	OpenGenset

Motor Özellikleri

Genel Bilgiler

Üretici	Cummins
Motor Modeli	QSK23-G3 (For DCCP)



Silindir Sayısı / Tipi	6 cylinders - in line
Bore mm (in)	170
Stroke mm (in)	170
Hacim l (cu. In)	23.15
Sıkıştırma Oranı	16.0 : 1
Motor Hızı (rpm)	1500
Standby Güç (kW/hp)	768/1030
DCC Güç (kW/hp)	701/940
Blok Isıtıcı (Adt)	1
Blok Isıtıcı Gücü (Watt)	3000
Governor Sistemi	Electronic
Hava Filtresi	Dry Type
Hava Emiş	Turbo Charged and Charge Air Cooled

Yağlama Sistemi

Yağ Kapasitesi l (gal)	103
Maks. Yağ Sıcaklığı °C (F)	120

Yakıt Sistemi

Yakıt Tipi	Diesel
Enjeksiyon Tipi	Direct Injection
Yakıt Pompa Tipi	Cummins HPI-PT

Elektrik Sistemi

Çalışma Voltajı (Vdc)	24 Vdc
Akü ve Kapasite (Adt/Ah)	2x143
Şarj Alternatörü (A)	35

Soğutma Sistemi

Soğutma Metodu	Air Cooled
Soğutma Suyu Kapasitesi (yalnızca motor)l (gal)	46,5

Egzoz Sistemi

Egzoz Gaz Debisi (m³/dk)	135,5
Egzoz Gaz Sıcaklığı °C (F)	532
Egzoz Geçen Isı kW (BTU/min)	507

Radyatör

Soğutma Fan Hava Debisi m³/min (ft³/min)	822
Soğutma Havası Harici Direnç (Pa)	120



Yakıt Tüketimi

%100 DCC Yükle Yakıt Tüketimi l/h (kg/h)	161
%75 DCC Yükle Yakıt Tüketimi l/h (kg/h)	121
%50 DCC Yükle Yakıt Tüketimi l/h (kg/h)	85

Alternator Özellikleri

Üretici	Stamford
Alternatör Model	S6L1D-C4 Wdg.311/312 (For DCCP)
Frekans (Hz)	50
Güç (kVA)	810
Voltaj (V)	400
Faz	3
A.V.R.	MX341
Voltaj Regülasyon	1
Yalıtım Sınıfı	H
Koruma Sınıfı	IP23
Nominal Güç Faktörü	0,8
Toplam Generator Ağırlık (kg)	1897
Sıcaklık Artış Sınıfı	H
Soğutma Havası (m³/dk)	87.6

Açık Jeneratör Boyutları

Uzunluk mm	4000
Genişlik mm	1710
Yükseklik mm	2270
Yakıt Tank Kapasitesi (l)	1500


Kontrol Paneli

Üretici	DSE
Kontrol Modül Modeli	DSE 7320
İletişim Portları	MODBUS

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's



7. Operation selecting buttons

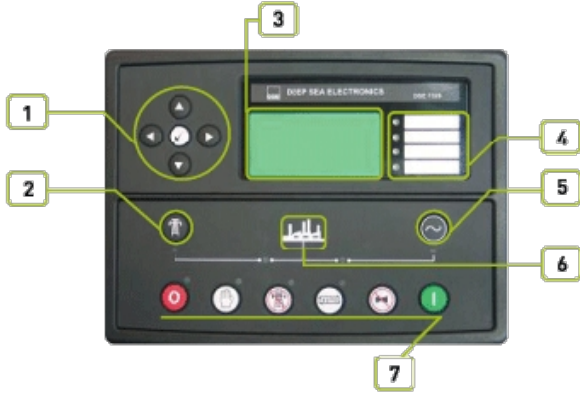

Standart Cihazlar

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions
Static battery charger, Fuses for control circuits

Kontrol Ünitesi

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Yapım ve Boya

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

Montaj

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

Motor

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

Durdurma

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation

Uyarılar

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal

Jeneratör

Ön-Alarmlar

Elektrik Açma



- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phasesequence

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Şebeke

- Voltage (L-L, L-N)
- Frequency

Genişleme Modülleri

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

Opsiyonlar

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

Kontrol Paneli Uyumluluk Listesi

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

Statik Akü Şarj Cihazı

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

Standart Ekipmanlar

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Roof top mounted Industrial exhaust silencer
- Static battery charger
- Manual for application and installation



Opsiyonel Ekipmanlar

Motor

- Fuel-Water Separator Filter
- Oil heater
- Air filter

Kontrol Paneli

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

Yardımcı Ekipmanlar

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

Kabin

- Galvanized Coating
- ISO Container
- Marine Grade Paint

Alternatör

- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker
- 5% derate when air inlet filters are fitted

Transfer Panosu

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

Egzoz

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

Opsiyonel Alternatör ve Kontrol Paneli

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

Aksa Sertifikalar

Direktifler

- 2006/42/EC : Machinery Safety Directive
- 2014/30/EU : Electromagnetic Compatibility Directive
- 2014/35/EU : Low Voltage Directive

Standartlar

- TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating current generating sets- Part:13: Safety

Quality Management Systems
ISO 9001:2015
ISO 14001:2015



ISO 45001:2018
ISO 50001:2018
ISO 27001:2013
ISO 10002:2018