



Introduction

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

Power

3 Phase, 60 Hz, PF 0.8

Voltage (V)	STANDBY RATING (ESP)		PRIME RATING (PRP)		STANDBY CURRENT (A)
	kW	kVA	kW	kVA	
380 / 220	504.0	630	456.00	570	957
480 / 277	504.0	630	456.00	570	758
208 / 120	504.0	630	456.00	570	1749

STANDBY RATING (ESP) Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528-1. Overload is not allowed.

PRIME RATING (PRP) Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528-1. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation.

General Characteristics

Model Name	AD 631-6
Frequency (Hz)	60
Fuel Type	Diesel
Engine Make and Model	Hyundai DP158LD
Alternator Make and Model	Stamford HCI544E
Control Panel Model	DSE 7320
Canopy	MS 70 TRP

Engine Specifications

General Data

Manufacturer	Hyundai
Engine Model	DP158LD
Number of Cylinders / Type	8 cylinders - V type

Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.

02/08/2026



Bore mm (in)	128
Stroke mm (in)	142
Displacement l (cu. In)	14.618
Compression Ratio	15.0:1
Engine Speed (rpm)	1800
Standby Power (kW/hp)	556/756
Prime Power (kW/hp)	505/687
Block Heater (QTY)	1
Block Heater Power (Watt)	3000
Governor System	Electronic
Air Filter	Dry Type
Aspiration	Turbo Charged and Intercooled (Air to Air)

Lubrication System

Oil Capacity l (gal)	22
Max. Oil Temperature °C (F)	120

Fuel System

Fuel Type	Diesel
Injection Type	Direct
Type of Fuel Pump	WEIFU in-line "P" type

Electrical System

Operating Voltage (Vdc)	24 Vdc
Battery and Capacity (Qty/Ah)	2x120
Charge Alternator (A)	45

Cooling System

Cooling Method	Water Cooled
Coolant Capacity (engine only) l (gal)	20

Exhaust System

Exhaust Gas Flow (m³/min)	108
Exhaust Back Pressure in-Hg (kPa)	5.9
Exhaust Gas Temperature °C (F)	567
Heat Rejection to Exhaust kW (BTU/min)	517

Radiator

Total Coolant Capacity (l)	90
Cooling Fan Air Flow m³/min (ft³/min)	700



External Restriction to Cooling Airflow (Pa)	125
--	-----

Fuel Consumption

Fuel Cons. @100% Prime Load l/h (kg/h)	139.6
Fuel Cons. @75% Prime Load l/h (kg/h)	101.0
Fuel Cons. @50% Prime Load l/h (kg/h)	68.1

Alternator Characteristics

Manufacturer	Stamford
Alternator Model	HCI544E
Frequency (Hz)	60
Power (kVA)	750
Voltage (V)	480
Phase	3
A.V.R.	AS440
Voltage Regulation	1
Insulation Class	H
Protection Class	IP23
Rated Power Factor	0.8
Weight Complete Generator (kg)	1543
Cooling Air (m³/min)	78,72

Open Generator Set Dimensions

Length mm	3104
Width mm	1550
Height mm	2062
Open Gen.Set Gross Weight Dry kg	3390
Full Tank Capacity (l)	700

Canopy Characteristics

Length mm	4434
Width mm	1606
Height mm	2518
Dry Weight kg	4240
Full Tank Capacity (l)	700

Control Panel

Manufacturer	DSE
--------------	-----




Control Module Model

DSE 7320

Communication Ports

MODBUS

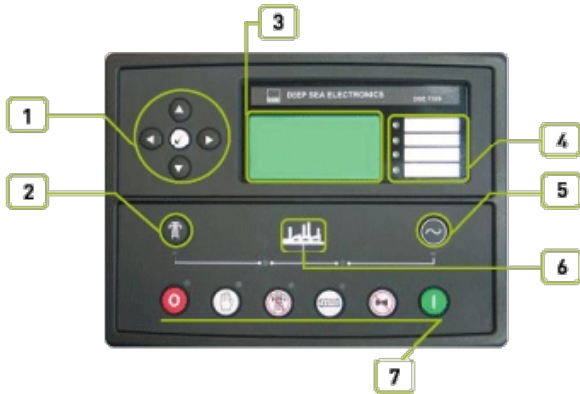

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

Standard Devices

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions
Static battery charger, Fuses for control circuits

Control Unit

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Construction and Finish

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

Installation

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

Engine

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

Shut Down

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open

Warnings

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal



-Phase rotation

Generator

- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVAh
- Phasesequence

Pre-alarms

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

Electrical Trip

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Mains

- Voltage (L-L, L-N)
- Frequency

Expansions

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

Options

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

Control Panel Compliance List

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

Static Battery Charger

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

Standard Equipment

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger



- Manual for application and installation

Optional Equipment

Engine

- Fuel-Water Separator Filter
- Oil heater

Alternator

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

Control Panel

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

Transfer Panel

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

Auxiliary Equipment

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

Exhaust

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

Canopy

- Galvanized Coating
- ISO Container
- Marine Grade Paint

Optional Alternator and Control Panel

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

Aksa Certificates

Directive

- 2006/42/EC : Machinery Safety Directive
- 2014/30/EU : Electromagnetic Compatibility Directive
- 2014/35/EU : Low Voltage Directive

Standarts

- TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating current generating sets- Part:13: Safety



Quality Management Systems

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
ISO 50001:2018
ISO 27001:2013
ISO 10002:2018