


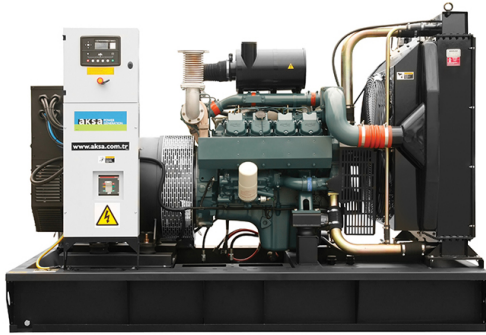

مقدمة

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

القوة

3 Phase, 60 Hz, PF 0.8

الجهد (فولت)	الطاقة الاحتياطية (ESP)		الطاقة الأولية		تيار الاستعداد
	kW	kVA	kW	kVA	
380 / 220	748,0	935	680.00	850	1421
480 / 277	752,0	940	680.00	850	1131

التشغيل الاحتياطي ينطبق على توفير الطاقة لأحمال كهربائية مختلفة طوال مدة انقطاع الطاقة من المصدر الرئيسي ويتوافق مع ISO 8528-1. غير مسموح في هذه الحالة التحميل الزائد.

التشغيل المستمر ينطبق على توفير الطاقة لأحمال كهربائية مختلفة لساعات غير محدودة ويتوافق مع ISO 8528-1. تتوفر إمكانية التحميل الزائد 10% لمدة ساعة واحدة خلال فترة 12 ساعة من التشغيل.

الخصائص العامة

اسم الموديل	AD 940-6
التردد (هرتز)	60
نوع الوقود	Diesel
نوع المحرك وطرازه	Hyundai DP222LC
نوع المولد والموديل	Stamford S6L1D-C
نموذج لوحة التحكم	DSE 7320
هيكل	MS 85 TRP

مواصفات المحرك

بيانات عامة

المصنع	Hyundai
نوع المحرك	DP222LC
عدد الاسطوانات	12 cylinders - V type
تتحمل (مم)	128



السكتة الدماغية (مم)	142
النزوح (لتر)	21.927
نسبة الضغط	15.0:1
سرعة المحرك (دورة في الدقيقة)	1800
الطاقة الاحتياطية (كيلوواط/حصان)	828/1126
الطاقة المستمرة (كيلوواط/حصان)	753/1023
كتلة سخان الكمية	1
قوة سخان الكتلة (وات)	3000
نظام التحكم	Electronic
مرشح الهواء	Dry Type
طموح	Turbo Charged and Intercooled (Air to Air)

نظام تشحيم

سعة الزيت (لتر)	40
الحد الأعلى لدرجة حرارة الزيت (درجة مئوية)	120

نظام الوقود

نوع الوقود	Diesel
نوع ونظام الحقن	Direct
نوع مضخة الوقود	WEIFU in-line "P" type

النظام الكهربائي

جهد التشغيل	24 Vdc
البطارية والسعة (الكمية/آه)	2x143
مولد الشحن (أمبير)	45

نظام التبريد

طريقة التبريد	Water Cooled
	23

نظام العادم

تدفق الغازات الناتجة (متر مكعب/دقيقة)	168
ضغط العادم الخلفي (كيلوباسكال)	5.9
درجة حرارة العادم (°C)	499
رفض الحرارة للعادم (كيلوواط)	754

المبرد

إجمالي سعة سائل التبريد (لتر)	104.2
تدفق هواء مروحة التبريد (م³/دقيقة)	860
(Pa) القيود الخارجية على تدفق هواء التبريد	125



استهلاك الوقود

سليبات الوقود. أولي مع حمل 100% (لتر/ساعة)	203.8
سليبات الوقود. أولي مع حمل 75% (لتر/ساعة)	147.2
سليبات الوقود. أولي مع حمل 50% (لتر/ساعة)	99.3

خصائص المولد

المصنع	Stamford
موديل المولد	S6L1D-C
التردد (هرتز)	60
القوة (كيلوفولت أمبير)	800
الجهد (فولت)	380
المرحلة	3
منظم	MX341
تنظيم الجهد	1
نظام العزل	H
الحماية	IP23
معامل القوة المقدرة	0.8
وزن المولد الكامل (كيلوغرام)	1970
فئة زيادة الحرارة	H
هواء التبريد (م ³ /دقيقة)	105.6

أبعاد المولد (مفتوح)

الطول (مم)	3470
العرض (مم)	1550
الارتفاع (مم)	2262
	4320
سعة الخزان (لتر)	1000

خصائص الهيكل

الطول (مم)	5251
العرض (مم)	1606
الارتفاع (مم)	2519
الوزن الجاف (كيلوغرام)	5535
سعة الخزان (لتر)	1000

لوحة التحكم


المصنع	DSE
--------	-----

نموذج وحدة التحكم

DSE 7320

منافذ الاتصال

MODBUS

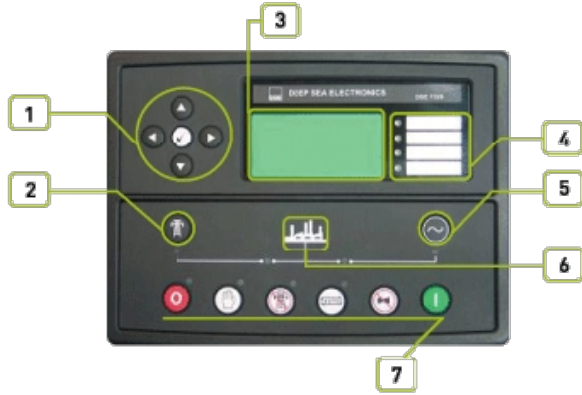

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

الأجهزة القياسية

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions
Static battery charger, Fuses for control circuits

وحدة التحكم

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

البناء والتشطيب

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

تركيب

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

محرك

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

إيقاف

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open

تحذيرات

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal



-Phase rotation

مولد

- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phasesequence

الإنذارات المسبقة

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

الإطفاء الكهربائي

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

أنابيب

- Voltage (L-L, L-N)
- Frequency

التوسعات

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

خيارات

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

قائمة الامتثال للوحة التحكم

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

شاحن بطارية ثابت

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output shot circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

المعدات القياسية

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger



- Manual for application and installation

معدات اختيارية

محرك

- Fuel-Water Separator Filter
- Oil heater

المولد

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

لوحة التحكم

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

لوحة النقل

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

المعدات المساعدة

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

عام

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

غطاء المولد

- Galvanized Coating
- ISO Container
- Marine Grade Paint

لوحة التحكم البديلة للمولد

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

شهادات الشركة

التوجيه

2006/42/EC : Machinery Safety Directive -
2014/30/EU : Electromagnetic Compatibility Directive -
2014/35/EU : Low Voltage Directive -

المعايير

TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating - current generating sets- Part:13: Safety

**Quality Management Systems**

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
ISO 50001:2018
ISO 27001:2013
ISO 10002:2018