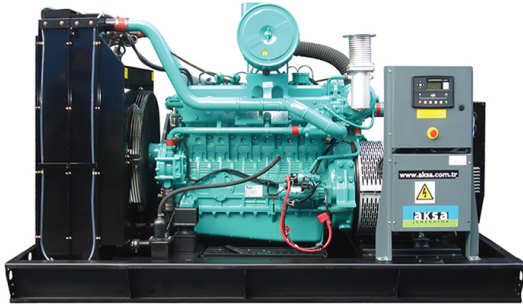


Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

3 Phase, 50 Hz, PF 0.8

| V         | (ESP) |     | (PRP) |     | (A) |
|-----------|-------|-----|-------|-----|-----|
|           | kW    | kVA | kW    | kVA |     |
| 400 / 231 | 168.0 | 210 | 152.0 | 190 | 303 |

备用额定值 (ESP) 适用于在可靠电源断电期间向变化的电力负载供电。

ESP符合ISO 8528-1。不允许过载。

主用功率 (PRP) 适用于在不受限制的时间内为变化的电力负载供电。PRP符合ISO 8528-1。在12小时的周期内允许1小时的10%过载能力。

|    |                         |
|----|-------------------------|
|    | ADG 210                 |
| Hz | 50                      |
|    | Natural Gas             |
|    | Hyundai GE12TI          |
|    | Mecc Alte ECO 38-2S/4 C |
|    | DSE 7320                |
|    | MS 60 NG                |

|    |                       |
|----|-----------------------|
|    | Hyundai               |
|    | GE12TI                |
|    | 6 cylinders - in line |
| mm | 123 (4,8)             |



|                               |               |
|-------------------------------|---------------|
| mm                            | 155 (6,1)     |
| lt.                           | 11,1 (674,5)  |
|                               | 10.5:1        |
| rpm                           | 1500          |
| kW/HP                         | 192 / 262     |
| kW/HP                         | 175 / 238     |
|                               | 1             |
|                               | 1500          |
|                               | ECU           |
|                               | Dry Type      |
|                               | Turbo Charged |
| lt                            | 25 (6,6)      |
|                               | Natural Gas   |
|                               | Spark-Ignited |
|                               | -             |
| Vdc                           | 24 Vdc        |
| /Ah                           | 2x85          |
| A                             | 45            |
|                               | Water Cooled  |
|                               | 21 (5,5)      |
| m <sup>3</sup> /min           | 23            |
| °C                            | 545           |
| RowFuelConsPrimeWith100LoadNG | 43,4 (31,1)   |
| RowFuelConsPrimeWith75LoadNG  | 34,3 (24,6)   |
| RowFuelConsPrimeWith50LoadNG  | 26,3 (18,9)   |



|                       |               |
|-----------------------|---------------|
|                       | Mecc Alte     |
|                       | ECO 38-2S/4 C |
| Hz                    | 50            |
| KVA                   | 200           |
| V                     | 400           |
|                       | 3             |
|                       | DSR           |
|                       | 1             |
|                       | H             |
|                       | IP23          |
|                       | 0.8           |
| kg                    | 550           |
|                       | H             |
| (m <sup>3</sup> /min) | 32            |
| Length3               | 2860          |
| mm                    | 1300          |
| Height3               | 1777          |
|                       | 2320          |
| Length3               | 3960          |
| Width3                | 1010          |
| Height3               | 2100          |
| kg                    | 2900          |
| lt                    | N/A           |
|                       | DSE           |
|                       | DSE 7320      |
|                       | MODBUS        |

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons



DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions  
Static battery charger, Fuses for control circuits

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal



- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVARh
- Phasesequence

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

- Voltage (L-L, L-N)
- Frequency

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

- Water cooled, gas engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger
- Manual for application and installation



- Fuel-Water Separator Filter
- Oil heater

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

- Galvanized Coating
- ISO Container
- Marine Grade Paint

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

## 指令

- 2006/42/EC : Machinery Safety Directive
- 2004/108/EC : Electromagnetic Compatibility Directive
- 2006/95/EC : Low Voltage Directive

## 标准

- EN ISO 8528-13:2016 : Reciprocating internal combustion engine-driven alternating current generating sets- Part:13: Safety

- Max load and overload ratings based on ISO 3046 gross flywheel power.
- Technical data based on ISO 3046-1 standards of 77°F(25°C), 14,5Psia (100kPa) and 30% relative humidity.



- Production tolerances in engines and installed components can account for power variations of  $\pm 5\%$ . Altitude, temperature and excessive exhaust and intake restrictions should be applied to power calculations.
- All fuel and thermal calculations unless otherwise noted are done at ISO 3046 rated load using LHV for NG of 48,17 MJ/kg.
- At 0,5 in-H<sub>2</sub>O of Package Restriction at STP
- Volume calculated using density of 0,717 kg/m<sup>3</sup> for NG and 0,51 kg/L for LPG