


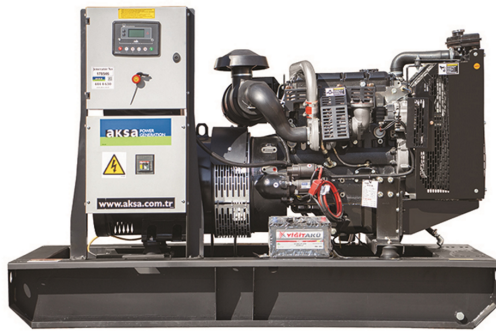

مقدمة

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

القوة

3 Phase, 60 Hz, PF 0.8

الجهد (فولت)	الطاقة الاحتياطية (ESP)		الطاقة الأولية		تيار الاستعداد
	kW	kVA	kW	kVA	
380 / 220	44,0	55	40.00	50	84
480 / 277	48,0	60	44.00	55	72
208 / 120	44,0	55	40.00	50	153

التشغيل الإحتياطي ينطبق على توفير الطاقة لأحمال كهربائية مختلفة طوال مدة انقطاع الطاقة من المصدر الرئيسي ويتوافق مع ISO 8528-1. غير مسموح في هذه الحالة التحميل الزائد.

التشغيل المستمر ينطبق على توفير الطاقة لأحمال كهربائية مختلفة لساعات غير محدودة ويتوافق مع ISO 8528-1. تتوفر إمكانية التحميل الزائد 10% لمدة ساعة واحدة خلال فترة 12 ساعة من التشغيل.

الخصائص العامة

اسم الموديل	AP 60-6
التردد (هرتز)	60
نوع الوقود	Diesel
نوع المحرك وطرازه	Perkins 1103A-33TG1
نوع المولد والموديل	Mecc Alte ECP 32-1M/4 C 60 Hz
نموذج لوحة التحكم	DSE 6120
هيكل	AK 21

مواصفات المحرك

بيانات عامة

المصنع	Perkins
نوع المحرك	1103A-33TG1
عدد الاسطوانات	3 cylinders - in line



تتحمل (مم)	105
السكتة الدماغية (مم)	127
النزوح (لتر)	3.3
نسبة الضغط	17.25:1
سرعة المحرك (دورة في الدقيقة)	1800
الطاقة الاحتياطية (كيلوواط/حصان)	55.6/74.56
الطاقة المستمرة (كيلوواط/حصان)	50.5/67.72
كتلة سخان الكمية	1
قوة سخان الكتلة (وات)	55
نظام التحكم	Mechanic
مرشح الهواء	Dry Type
طموح	Turbo Charged

نظام تشحيم

سعة الزيت (لتر)	8.3
الحد الأعلى لدرجة حرارة الزيت (درجة مئوية)	125

نظام الوقود

نوع الوقود	Diesel
نوع ونظام الحقن	Direct
نوع مضخة الوقود	Rotary

النظام الكهربائي

جهد التشغيل	12 Vdc
البطارية والسعة (الكمية/أه)	1x55
مولد الشحن (أمبير)	65

نظام التبريد

طريقة التبريد	Water Cooled
	4.4

نظام العادم

تدفق الغازات الناتجة (متر مكعب/دقيقة)	9.5
ضغط العادم الخلفي (كيلوباسكال)	15
درجة حرارة العادم (°C)	551
رفض الحرارة للعادم (كيلوواط)	43

المبرد

إجمالي سعة سائل التبريد (لتر)	10.2
تدفق هواء مروحة التبريد (م³/دقيقة)	70



(Pa) القيود الخارجية على تدفق هواء التبريد

125

استهلاك الوقود

سليبات الوقود. أولي مع حمل 100% (لتر/ساعة)

12.9

سليبات الوقود. أولي مع حمل 75% (لتر/ساعة)

9.9

سليبات الوقود. أولي مع حمل 50% (لتر/ساعة)

7.1

خصائص المولد

المصنع

Mecc Alte

موديل المولد

ECP 32-1M/4 C 60 Hz

التردد (هرتز)

60

القوة (كيلوفولت أمبير)

60

الجهد (فولت)

480

المرحلة

3

منظم

DSR

تنظيم الجهد

1

نظام العزل

H

الحماية

IP23

معامل القوة المقدرة

0.8

وزن المولد الكامل (كيلوغرام)

186

فئة زيادة الحرارة

H

هواء التبريد (م³/دقيقة)

15.7

أبعاد المولد (مفتوح)

الطول (مم)

1691

العرض (مم)

970

الارتفاع (مم)

1225

750

سعة الخزان (لتر)

80

خصائص الهيكل

الطول (مم)

2102

العرض (مم)

1026

الارتفاع (مم)

1290

الوزن الجاف (كيلوغرام)

960

سعة الخزان (لتر)

80

لوحة التحكم



المصنع

DSE

نموذج وحدة التحكم

DSE 6120

منافذ الاتصال

CANBUS



1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

الأجهزة القياسية

DSE model 6120, Auto Mains Failure control module, Static battery charger input 198-264 volt, output 27,6V 5A (24V) or 13,8 Volt 5A (12V), fuses for control circuits. This Control Module is suitable for a wide variety of single gen-set applications

وحدة التحكم

- The DSE 6120 module has been designed to monitor generator frequency, volt, current, engine oil pressure, coolant temperature running hours and battery volts.
- Module monitors the mains supply and control the switch over to the generator when the mains power fails.
- The DSE6120 also indicates operational status and fault conditions, Automatically shutting down the Gen. Set and giving true first up fault condition of Gen. Set failure. The LCD display indicates the fault.

البناء والتشطيب

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion corrosion-resistant surface. Polyester composite powder topcoat forms a high gloss and extremely durable finish. Lockable and hinged panel door provides easy access to components.

تركيب

Control panel is mounted on baseframe with steel stand. Located at the right side of the generator set (When you look at the Gen.Set. from Alternator side)

محرك

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- battery volts
- Configurable timing

إيقاف

- Fail to start
- Emergency stop
- Low oil pressure
- High coolant temperature
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Coolant temperature sensor

تحذيرات

- Charge failure
- Battery Low/High voltage
- Fail to stop.
- Low /High generator voltage
- Under /Over generator frequency
- Over /Under speed
- Low oil pressure
- High coolant temperature



open

مولد

- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Gen. Set ready
- Gen. Set enabled

الإطفاء الكهربائي

- Generator over current

أنابيب

- Mains ready
- Mains enabled

خيارات

- Flexible sensor can be controlled with temperature, pressure, percentage (warning/shutdown/electrical trip)
- Local setting parameters and monitoring from PC to control module with USB connection (max 6 mt).

قائمة الامتثال للوحة التحكم

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 60950 Electrical Safety
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard

شاحن بطارية ثابت

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square and output is 5 amper, 13,8 V for 12 volt and 27,6 V for 24 V . Input 198 - 264 volt AC.
- The charger is fitted with a protection diode across the output.
- Connect charge fail relay coil between positive output and CF output.
- They are equipped with RFI filter to reduce electrical noise radiated from the device.
- Galvanically isolated input and output typically 4kV for high reliability.

المعدات القياسية

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger
- Manual for application and installation

معدات اختيارية

محرك

- Fuel-Water Separator Filter

المولد

- Anti-Condensation Heater



- Oil heater

- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

لوحة التحكم

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

لوحة النقل

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

المعدات المساعدة

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

عام

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

غطاء المولد

- Galvanized Coating
- ISO Container
- Marine Grade Paint

لوحة التحكم البديلة للمولد

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

شهادات الشركة

التوجيه

2006/42/EC : Machinery Safety Directive -
2014/30/EU : Electromagnetic Compatibility Directive -
2014/35/EU : Low Voltage Directive -

المعايير

TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating - current generating sets- Part:13: Safety

Quality Management Systems

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
ISO 50001:2018
ISO 27001:2013
ISO 10002:2018

