



## مقدمة

Aksa is committed to providing the most effective solution to the Data Center industry with the power it takes from engineering, production, distribution, and customer-oriented experience and knowledge. We are constantly improving designs, products and infrastructure to offer the highest level of reliability for Emergency Power Systems. While serving the industry in hundreds of countries Globally, we design our products and systems in line with the needs of Data Center practitioners at the center of our focus. Aksa generator group provides continuity, reliability and ideal performance for Data Centers.

## القوة

3 Phase, 60 Hz, PF 0.8

| الجهد (فولت) | الطاقة الاحتياطية (ESP) |      | تصنيف DCC (DCP) |      | DCC تيار (أ) |
|--------------|-------------------------|------|-----------------|------|--------------|
|              | kW                      | kVA  | kW              | kVA  |              |
| 480 / 277    | 1994,4                  | 2493 | 1801.60         | 2252 | 2999         |

مركز البيانات المستمر (DCC): أقصى قدرة يمكن لمجموعة توليد توفيرها أثناء توفير تيار كهربائي متغير أو مستمر وخلال ساعات تشغيل غير محدودة. يعتمد ذلك على المواقع التي يتعين تزويدها وتوفر الخدمات العامة.

الواردة DCC، كما هو مفصل في معايير معهد الوقت التشغيل: الهيكل. تم التعرف على تصنيفات الطاقة للبيانات الاحتياطية و IV و III تلي تصنيفات الطاقة لمركز البيانات المستمر، كما هو محدد، متطلبات معهد الوقت التشغيل المستوى DCC: "أعلاه، وفقاً لطروف الضغط الجوي بمعدل 100 كيلوباسكال (ارتفاع 110 متراً) ودرجة حرارة الجو بمعدل 25 درجة مئوية. \* نسبة التسامح للبيانات -5 %

## الخصائص العامة

|                     |                                      |
|---------------------|--------------------------------------|
| اسم الموديل         | AUDC 2000-6                          |
| التردد (هرتز)       | 60                                   |
| نوع الوقود          | Diesel                               |
| نوع المحرك وطرازه   | Cummins QSK60-G6 (For DCCP)          |
| نوع المولد والموديل | Stamford S7L1D-G4 Wdg.312 (For DCCP) |
| نموذج لوحة التحكم   | DSE 7320                             |
| هيكل                | OpenGenset                           |

## مواصفات المحرك

### بيانات عامة

|                |                       |
|----------------|-----------------------|
| المصنع         | Cummins               |
| نوع المحرك     | QSK60-G6 (For DCCP)   |
| عدد الاسطوانات | 16 cylinders - V type |



|                                  |                                              |
|----------------------------------|----------------------------------------------|
| تتحمل (مم)                       | 159                                          |
| السكتة الدماغية (مم)             | 190                                          |
| النزوح (لتر)                     | 60.2                                         |
| نسبة الضغط                       | 14.5:1                                       |
| سرعة المحرك (دورة في الدقيقة)    | 1800                                         |
| الطاقة الاحتياطية (كيلوواط/حصان) | 2179/2922                                    |
| DCC (PRP) تصنيف                  | 1975/2647                                    |
| كتلة سخان الكمية                 | 2                                            |
| قوة سخان الكتلة (وات)            | 3000                                         |
| نظام التحكم                      | CM2250                                       |
| مرشح الهواء                      | Dry Type                                     |
| طموح                             | Turbocharged and Low Temperature Aftercooled |

#### نظام تشحيم

|                                            |     |
|--------------------------------------------|-----|
| سعة الزيت (لتر)                            | 261 |
| الحد الأعلى لدرجة حرارة الزيت (درجة مئوية) | 121 |

#### نظام الوقود

|                 |                  |
|-----------------|------------------|
| نوع الوقود      | Diesel           |
| نوع ونظام الحقن | Direct Injection |
| نوع مضخة الوقود | Cummins HPI-PT   |

#### النظام الكهربائي

|                             |        |
|-----------------------------|--------|
| جهد التشغيل                 | 24 Vdc |
| البطارية والسعة (الكمية/أه) | 4x143  |
| مولد الشحن (أمبير)          | 55     |

#### نظام التبريد

|               |              |
|---------------|--------------|
| طريقة التبريد | Water Cooled |
|               | 159          |

#### نظام العادم

|                                       |      |
|---------------------------------------|------|
| تدفق الغازات الناتجة (متر مكعب/دقيقة) | 399  |
| ضغط العادم الخلفي (كيلوباسكال)        | 6.8  |
| درجة حرارة العادم (°C)                | 460  |
| رفض الحرارة للعادم (كيلوواط)          | 1415 |

#### المبرد

|                                            |        |
|--------------------------------------------|--------|
| تدفق هواء مروحة التبريد (م³/دقيقة)         | 2338,2 |
| (Pa) القيود الخارجية على تدفق هواء التبريد | 120    |



### استهلاك الوقود

|                                            |     |
|--------------------------------------------|-----|
| كجم/س (ل/س) DCC استهلاك الوقود @100% حمولة | 466 |
| كجم/س (ل/س) DCC استهلاك الوقود @75% حمولة  | 356 |
| كجم/س (ل/س) DCC استهلاك الوقود @50% حمولة  | 247 |

### خصائص المولد

|                                      |                             |
|--------------------------------------|-----------------------------|
| المصنع                               | Stamford                    |
| موديل المولد                         | S7L1D-G4 Wdg.312 (For DCCP) |
| التردد (هرتز)                        | 60                          |
| القوة (كيلوفولت أمبير)               | 2600                        |
| الجهد (فولت)                         | 480                         |
| المرحلة                              | 3                           |
| منظم                                 | MX341                       |
| تنظيم الجهد                          | 1                           |
| نظام العزل                           | H                           |
| الحماية                              | IP23                        |
| معامل القوة المقدرة                  | 0,8                         |
| وزن المولد الكامل (كيلوغرام)         | 3637                        |
| فئة زيادة الحرارة                    | H                           |
| هواء التبريد (م <sup>3</sup> /دقيقة) | 172,2                       |

### أبعاد المولد (مفتوح)

|                  |      |
|------------------|------|
| الطول (مم)       | 6000 |
| العرض (مم)       | 2500 |
| الارتفاع (مم)    | 3220 |
| سعة الخزان (لتر) | 2000 |


### لوحة التحكم

|                   |          |
|-------------------|----------|
| المصنع            | DSE      |
| نموذج وحدة التحكم | DSE 7320 |
| منافذ الاتصال     | MODBUS   |

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's



## 7. Operation selecting buttons

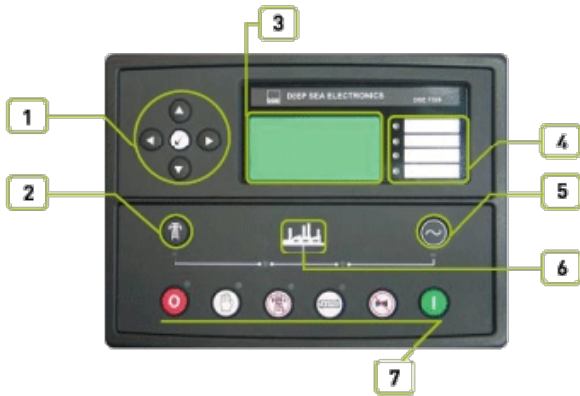

### الأجهزة القياسية

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions  
Static battery charger, Fuses for control circuits

### وحدة التحكم

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

### البناء والتشطيب

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

### تركيب

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

### محرك

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

### إيقاف

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation

### تحذيرات

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal

### مولد

### الإنذارات المسبقة

### الإطفاء الكهربائي



- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phasesequence

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

#### أنابيب

- Voltage (L-L, L-N)
- Frequency

#### التوسعات

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

#### خيارات

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

#### قائمة الامتثال للوحة التحكم

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

#### شاحن بطارية ثابت

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

#### المعدات القياسية

- Water cooled diesel engine
- Radiator and electrical motor driven fan
- Protective cage to prevent rotating and touching hot parts
- Output breaker
- Electric starter and charge alternator
- Battery (lead acid), cables and stand
- Automatic synchronization and power control system (multiple parallel generator)
- Circulation pump (for engine block heater)
- Engine block water heater
- Steel chassis and anti-vibration wedges
- Fuel tank separate from the group
- Flexible fuel connection hoses
- Alternator with single bearing and H insulation class
- Industrial capacity muffler and flexible steel compensator
- Electronic battery charger



- Operating and installation instructions

## معدات اختيارية

### محرك

- Fuel-Water Separator Filter
- Oil heater
- Air filter

### المولد

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker
- 5% derate when air inlet filters are fitted

### لوحة التحكم

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

### لوحة النقل

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

### المعدات المساعدة

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

### عام

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

### غطاء المولد

- Galvanized Coating
- ISO Container
- Marine Grade Paint

### لوحة التحكم البديلة للمولد

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

## شهادات الشركة

### التوجيه

2006/42/EC : Machinery Safety Directive -  
2014/30/EU : Electromagnetic Compatibility Directive -  
2014/35/EU : Low Voltage Directive -

### المعايير

TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating - current generating sets- Part:13: Safety

**Quality Management Systems**

ISO 9001:2015  
ISO 14001:2015  
ISO 45001:2018  
ISO 50001:2018  
ISO 27001:2013  
ISO 10002:2018