



Ürün Hakkında

The GreenTech Series is a sustainable generator solution designed to reduce environmental impact through alternative fuel compatibility, low emission levels, and reduced noise output. With HVO fuel support and advanced exhaust and safety systems, it ensures compliance with environmental standards and significantly reduces carbon emissions. The GreenTech Series offers lifecycle performance certified by EPD and LCA. Through the use of recycled and bioplastic materials, hybrid-ready infrastructure, and environmentally conscious production processes, the GreenTech Series contributes to long-term sustainability goals. (Image is for illustrative purposes only.)

Güç

3 Phase, 50 Hz, PF 0.8

Voltaj (V)	STANDBY GÜÇ(ESP)		PRIME GÜÇ (PRP)		STANDBY AKIM (A)
	kW	kVA	kW	kVA	
400 / 231	220,0	275	200.0	250	397

STANDBY RATING (ESP) Güvenilir bir şebeke kaynağının güç kesintisi süresince değişken elektrik yüküne güç sağlamak için geçerlidir. ESP, ISO 8528-1'e uygundur. Aşırı yüklemeye izin verilmez.

PRIME RATING (PRP) Değişken elektrik yüküne sınırsız saat boyunca güç sağlamak için geçerlidir. PRP, ISO 8528-1'e uygundur. %10 aşırı yük kapasitesi, 12 saatlik çalışma süresi içinde 1 saatlik bir süre için kullanılabilir.

Genel Özellikler

Model Adı	AP 275 - GTS
Frekans (Hz)	50
Yakıt Tipi	Diesel
Motor Marka ve Modeli	Perkins 1206A-E70TTAG3
Alternatör Marka ve Modeli	Mecc Alte
Kontrol Panel Modeli	DSE 7320
Kabin Modeli	GTS 10
Ses Seviyesi @1m , @7m (dB(A))	83.7 / 75.3

Motor Özellikleri

Genel Bilgiler

Üretici	Perkins
---------	---------



Motor Modeli	1206A-E70TTAG3
Silindir Sayısı / Tipi	6 cylinders - in line
Bore mm (in)	105
Stroke mm (in)	135
Hacim l (cu. In)	7.01
Sıkıştırma Oranı	15.8:1
Motor Hızı (rpm)	1500
Standby Güç (kW/hp)	248.6/333.1
Prime Güç (kW/hp)	226.2/303.1
Blok Isıtıcı (Adt)	1
Blok Isıtıcı Gücü (Watt)	1500
Governor Sistemi	ECM
Hava Filtresi	Dry Type
Hava Emiş	Turbo Charged and After Cooled

Yağlama Sistemi

Yağ Kapasitesi l (qal)	41
Maks. Yağ Sıcaklığı °C (F)	135

Yakıt Sistemi

Yakıt Tipi	Diesel
Enjeksiyon Tipi	Denso G3S
Yakıt Pompa Tipi	Denso HP4

Elektrik Sistemi

Çalışma Voltajı (Vdc)	12 Vdc
Akü ve Kapasite (Adt/Ah)	1x85
Şarj Alternatörü (A)	100

Soğutma Sistemi

Soğutma Metodu	Water Cooled
Soğutma Suyu Kapasitesi (yalnızca motor)l (gal)	25

Egzoz Sistemi

Egzoz Gaz Debisi (m³/dk)	33.7
Egzoz Geri Basınç in-Hg (kPa)	15
Egzoz Gaz Sıcaklığı °C (F)	511
Egzoz Geçen Isı kW (BTU/min)	281.6

Radyatör



Toplam Soğutma Suyu Kapasitesi (l)	29.6
Soğutma Fan Hava Debisi m ³ /min (ft ³ /min)	265.2
Soğutma Havası Harici Direnç (Pa)	125

Yakıt Tüketimi

%100 Prime Yükte Yakıt Tüketimi l/h (kg/h)	56.9
%75 Prime Yükte Yakıt Tüketimi l/h (kg/h)	41.5
%50 Prime Yükte Yakıt Tüketimi l/h (kg/h)	28.1

Alternator Özellikleri

Üretici	Mecc Alte
Alternatör Model	ECO 38-2M/4 C
Frekans (Hz)	50
Güç (kVA)	250
Voltaj (V)	400
Faz	3
A.V.R.	DSR
Voltaj Regülasyon	1
Yalıtım Sınıfı	H
Koruma Sınıfı	IP23
Nominal Güç Faktörü	0.8
Toplam Generator Ağırlık (kg)	653
Sıcaklık Artış Sınıfı	H
Soğutma Havası (m ³ /dk)	32

Açık Jeneratör Boyutları


Uzunluk mm	2750
Genişlik mm	1300
Yükseklik mm	1892
Açık Gen.Set Brüt Ağırlık, Kuru kg	2165
Yakıt Tank Kapasitesi (l)	470

Kabin Özellikleri

Uzunluk mm	2760
Genişlik mm	1100
Yükseklik mm	1641
Kuru Ağırlık kg	3180
Yakıt Tank Kapasitesi (l)	240

Kontrol Paneli

Üretici	DSE
Kontrol Modül Modeli	DSE 7320
İletişim Portları	MODBUS

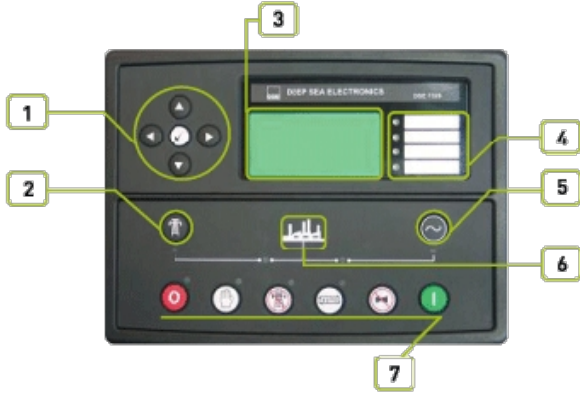

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

Standart Cihazlar

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions
Static battery charger, Fuses for control circuits

Kontrol Ünitesi

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Yapım ve Boya

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

Montaj

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

Motor

- Engine speed
- Oil pressure
- Coolant temperature
- Run time

Durdurma

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature

Uyarılar

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)



- Battery volts
- Engine maintenance due

- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation

- kW over load
- Negative phase sequence
- Loss of speed signal

Jeneratör

- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phasesequence

Ön-Alarmlar

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

Elektrik Açma

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Şebeke

- Voltage (L-L, L-N)
- Frequency

Genişleme Modülleri

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

Opsiyonlar

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

Kontrol Paneli Uyumluluk Listesi

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

Statik Akü Şarj Cihazı

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

Standart Ekipmanlar

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater



- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately (for open sets)
- Static battery charger
- Manual for application and installation

Opsiyonel Ekipmanlar

Motor

- Fuel-Water Separator Filter
- Oil heater

Alternatör

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

Kontrol Paneli

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

Transfer Panosu

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

Yardımcı Ekipmanlar

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

Egzoz

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

Kabin

- Galvanized Coating
- ISO Container
- Marine Grade Paint

Opsiyonel Alternatör ve Kontrol Paneli

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

Aksa Sertifikalar

Direktifler

- 2006/42/EC : Machinery Safety Directive
- 2014/30/EU : Electromagnetic Compatibility Directive
- 2014/35/EU : Low Voltage Directive

Standartlar



- TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating current generating sets- Part:13: Safety

Quality Management Systems

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
ISO 50001:2018
ISO 27001:2013
ISO 10002:2018