


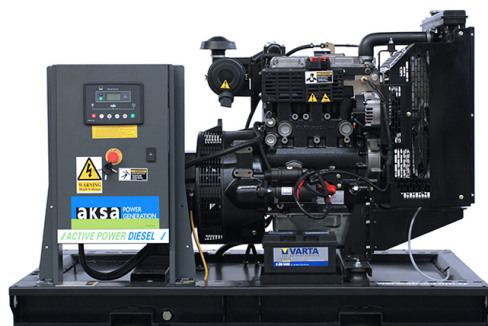

Einführung

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

Leistung

3 Phase, 60 Hz, PF 0.8

Spannung (V)	Bereitschaftsleistung (ESP)		Primärleistung		Standby-Strom
	kW	kVA	kW	kVA	
380 / 220	26,4	33	24.00	30	50
480 / 277	32,0	40	28.80	36	48
208 / 120	28,8	36	26.40	33	100

„STANDBY-RATING (ESP) Gilt für die Stromversorgung wechselnder elektrischer Lasten für die Dauer einer Stromunterbrechung einer zuverlässigen Versorgungsquelle. ESP entspricht ISO 8528-1. Überlast ist nicht erlaubt.“

PRIME RATING (PRP) Gilt für die Stromversorgung unterschiedlicher elektrischer Lasten für unbegrenzte Stunden. PRP entspricht ISO 8528-1. 10 % Überlast ist für einen Zeitraum von 1 Stunde innerhalb eines 12-stündigen Betriebszeitraums verfügbar.

Allgemeine Charakteristiken

Modellname	AP 40-6
Frequenz (Hz)	60
Treibstoffart	Diesel
Motor Marke und Modell	Perkins 1103A-33G
Marke und Modell des Generators	Mecc Alte ECP 28-VL/4 C 60 Hz
Steuerung Modell	DSE 6020
Schalldämmhaube	AK 21

Motorspezifikationen

Allgemeine Daten

Hersteller	Perkins
Motor Modell	1103A-33G



Anzahl der Zylinder	3 cylinders - in line
Bohrung (mm)	105
Hub (mm.)	127
Hubraum (lt.)	3.3
Kompressionsrate	19.25:1
Motorumdrehungen (U/min)	1800
Standby-Leistung (kW/PS)	36.5/49.64
Prime Leistung (kW/PS)	33.2/44.52
Kühlwasservorwärmung Anzahl	1
Kühlwasservorwärmung (Watt)	500
Drehzahlregelung	Mechanic
Luftfilter	Dry Type
Ansaugung	Naturally Aspirated

Schmiersystem

Ölkapazität (lt)	8.3
Max. Öltemperatur (°C)	125

Kraftstoffsystem

Treibstoffart	Diesel
Injektionsart und -system	Direct
Typ der Kraftstoffpumpe	Rotary

Elektrisches System

Betriebsspannung (Vdc)	12 Vdc
Batterie und Kapazität (Menge/Ah)	1x55
Lichtmaschine	65

Kühlsystem

Kühlungsmethode	Water Cooled
	4.4

Abgassystem

Abgasstrom (m³/min.)	6.4
Abgasgegendruck (kPa)	10
Abgastemp. (C)	520
Wärmeabgabe an das Abgas	27

Kühler



Gesamtkühlmittelkapazität (lt)	10.2
Luftstrom des Kühlgebläses (m³/min.)	70
Externe Einschränkung des Kühlluftstroms (Pa)	125

Kraftstoffverbrauch

Kraftstoffverbrauch Prime mit 100 % Leistung (l/h)	8.6
Kraftstoffverbrauch Prime mit 75 % Leistung (l/h)	6.6
Kraftstoffverbrauch Prime mit 50 % Leistung (l/h)	4.9

Eigenschaften des Generators

Hersteller	Mecc Alte
Generatormodell	ECP 28-VL/4 C 60 Hz
Frequenz (Hz)	60
Leistung (kVA)	36
Spannung (V)	480
Phase	3
Regler	DSR
Spannungsregulierung	1
Isoliersystem	H
Schutz	IP23
Nennleistungsfaktor	0,8
Gewicht kompletter Generator (kg)	141,8
Temperaturerhöhungs-Klasse	125/40
Kühlungsluft (m³/min)	8

Abmessungen des offenen Aggregates


Länge (mm)	1691
Breite (mm)	970
Höhe (mm)	1221
	665
Tankinhalt (lt.)	80

Eigenschaften der Schalldämmhaube

Länge (mm)	2102
Breite (mm)	1026
Höhe (mm)	1290
Trockengewicht (kg.)	880
Tankinhalt (lt.)	80

Steuerung

Hersteller	DSE
Steuerungsmodul Modell	DSE 6020
Kommunikationsanschlüsse	N/A

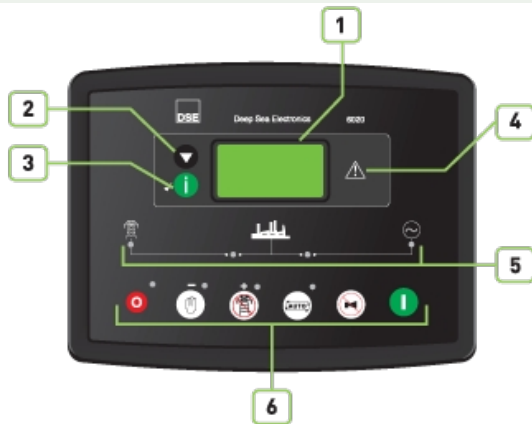

1. Main status display.
2. Display scroll button.
3. Page(information) button.
4. Common alarm indicator.
5. Status LED's.
6. Operation selecting buttons.

Standardgeräte

- DSE, model 6020 Auto Mains Failure control module.
- Battery charger input 198-264 volt, output 27,6 V 5 A (24 V) or 13,8 Volt 5A (12V)
- Emergency stop push button and fuses for control circuits.

Steuergerät

The DSE 6020 is a standard control module for our generator sets up to 200kVA and it has been designed to start and stop diesel and gas generator sets.

The DSE 6020 module has been designed to monitor generator frequency, volt, current, engine oil pressure, coolant temperature running hours and battery volts.

Module monitors the mains supply and switches over to the generator when the mains power fails.

The DSE6020 also indicates operational status and fault conditions, Automatically shutting down the Gen. Set and giving true first-up fault condition of Gen. Set failure. The LCD display indicates the fault.

Bau und Fertigstellung

- Components installed in a sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface. Polyester composite powder topcoat forms a high gloss and extremely durable finish. Lockable and hinged panel door provides easy access to components.

Installation

Control panel is mounted on baseframe with steel stand. Located at the right side of the generator set (When you look at the Gen.Set. from Alternator)



Optionen

- Flexible sensor can be controlled with temperature, pressure, percentage (warning/shutdown/electrical trip)
- Local setting parameters and monitoring from PC to control module with USB connection (max 6 mt).

Compliance-Liste des Control Panels

- Electrical Safety / EMC compatibility
- BS EN 60950 Electrical business equipment.
 - BS EN 61000-6-2 EMC immunity standard.
 - BS EN 61000-6-4 EMC emission standard

Statisches Batterieladegerät

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency. Battery charger models' output V-I characteristic is very close to square and output is 5 amper, 13,8 V for 12 volt and 27,6 V for 24 V . Input 198 - 264 volt AC. Proline 2405 has fully output short circuit protection and it can be used as a current source. Proline 1205/2405 charger has high efficiency, long life, low failure rate, lightweight and low heat radiated in accordance with linear alternatives. The charger is fitted with a protection diode across the output. Connect charge fail relay coil between the positive output and CF output. They are equipped with RFI filter to reduce electrical noise radiated from the device. Galvanically isolated input and output typically 4kV for high reliability.

Standard Ausrüstung

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately (for open sets)
- Static battery charger
- Manual for application and installation

Optionale Ausrüstung

Motor

- Fuel-Water Separator Filter
- Oil heater

Generator

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

Steuerung

- Automatic synchronising and power control system (Multi

Transferpanel

- Three or four pole contactor

**gen-set Parallel)**

- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

- Three or four pole motor operated circuit breaker

Zusatzausr stung

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30 C)

Auspuff

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

Geh use

- Galvanized Coating
- ISO Container
- Marine Grade Paint

Optionales Generatorsteuerfeld

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

Aksa-Zertifikate**Richtlinie**

- 2006/42/EC : Machinery Safety Directive
- 2014/30/EU : Electromagnetic Compatibility Directive
- 2014/35/EU : Low Voltage Directive

Standards

- TS ISO 8528-5:2022 / TS EN ISO 8528-13:2018 : Reciprocating internal combustion engine-driven alternating current generating sets- Part:13: Safety

Quality Management Systems

- ISO 9001:2015
- ISO 14001:2015
- ISO 45001:2018
- ISO 50001:2018
- ISO 27001:2013
- ISO 10002:2018