





WeLight

Diesel Lighting Tower

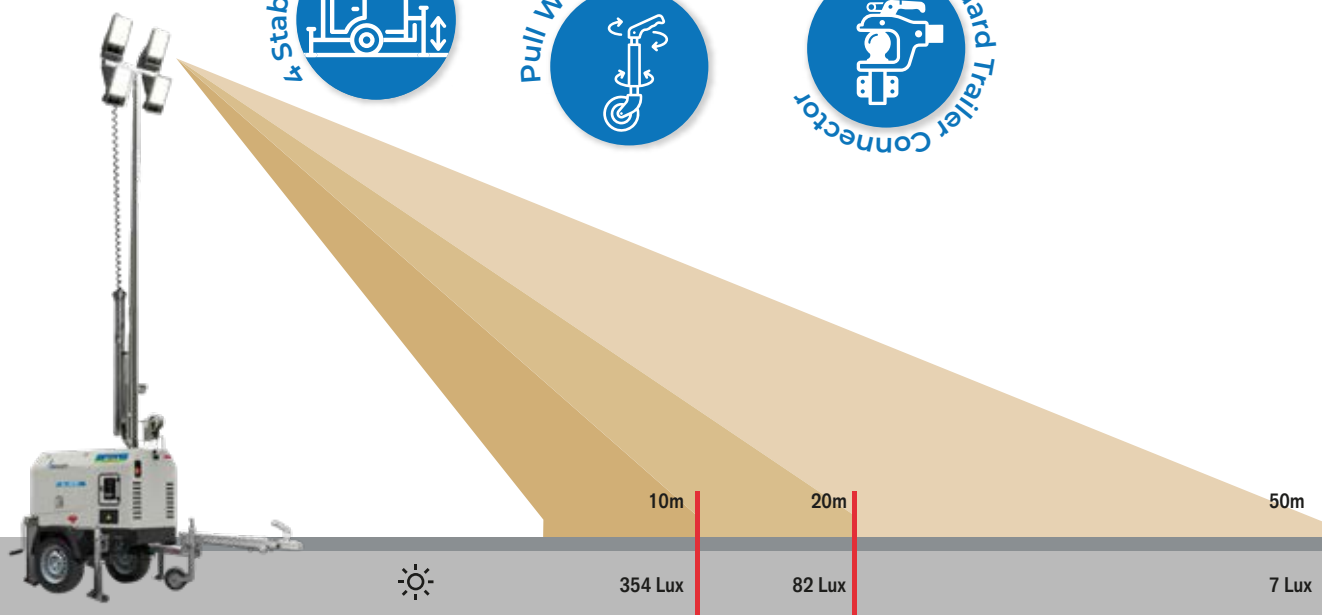

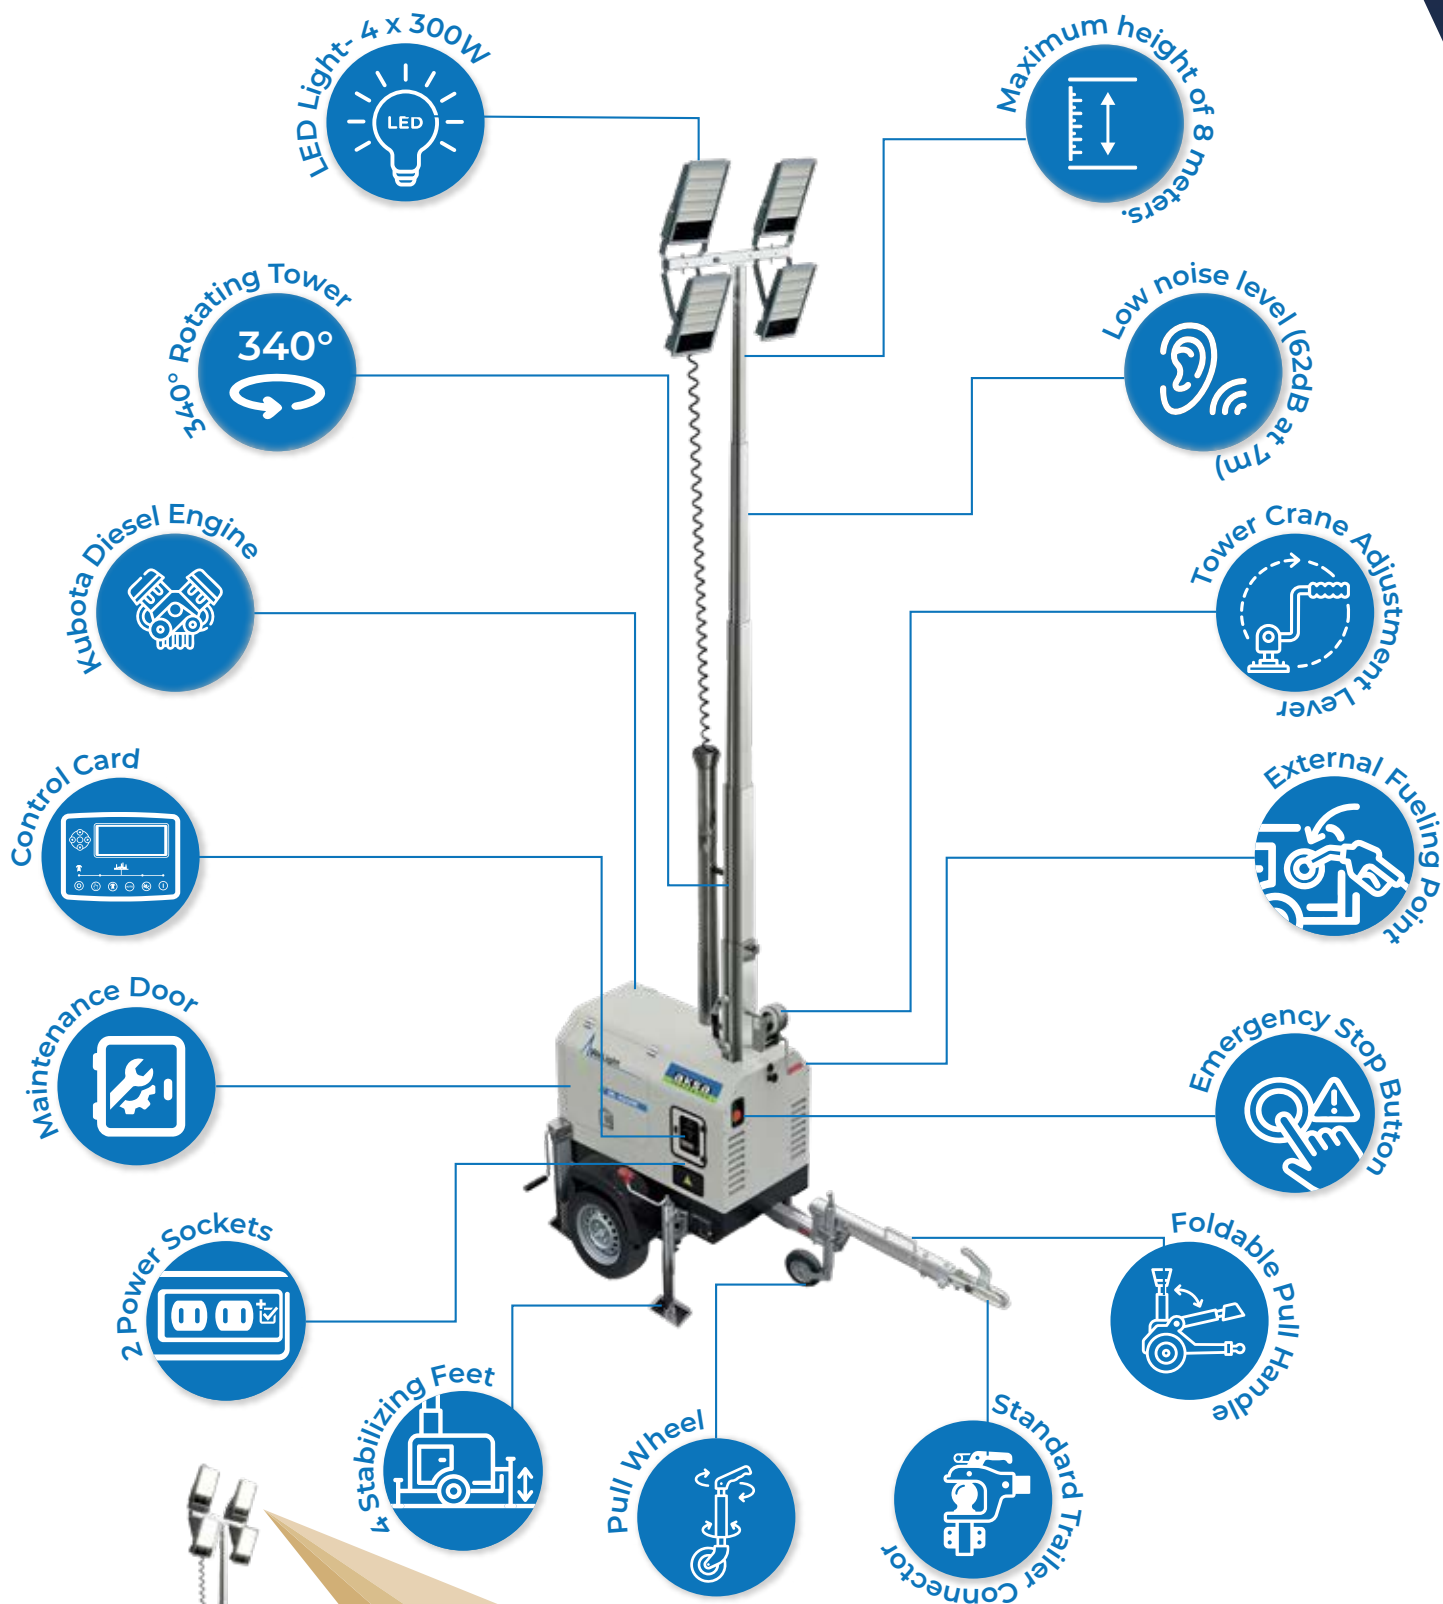

www.aksa.com.tr

WL-4000V

Specifications

Liquid-cooled engine make/model Kubota	Z482
Nominal power (kW)	2.8
Fuel capacity (L)	110
Frequency (Hz) / Voltage (V)	50/230
Maximum wind resistance (m/s)	17.5
Maximum transport speed (km/h)	80
Average noise level 62 dB(A) @	7m
Minimum dimensions (mm) (LxWxH)	1560 x 1320 x 2850
Maximum dimensions (mm) (LxWxH)	2260 x 2450 x 8000
Operating weight (kg)	700
Lifting system	Manual
Mast height (m) / Rotation angle (°)	8/340
Power socket	2x16A (GHGU, TÜV, IP44)

Lighting Type


Total power (W)	4 x 400W
Light output (Lumens)	224000
LED type	SMD Projectors
Işık huzmesi açısı	110°
Illuminated area (m ²)	10000
Operating hours (hours)	159

- Options

- 60Hz Operating Frequency
- 4 x 300W LED lamps
- Stabilizing Feet

AKSA 400W LED, when compared to commonly used lighting tower LEDs.

- | | |
|--|---|
| - AKSA WL -4000V | - Standard LED lighting tower |
| - 4 x 400W | - 4 x 320W |
| - Lighting Range: | - Lighting Area: |
| - Effective illumination area 10000 m ² @5 lm | - Effective lighting area 6000 m ² |

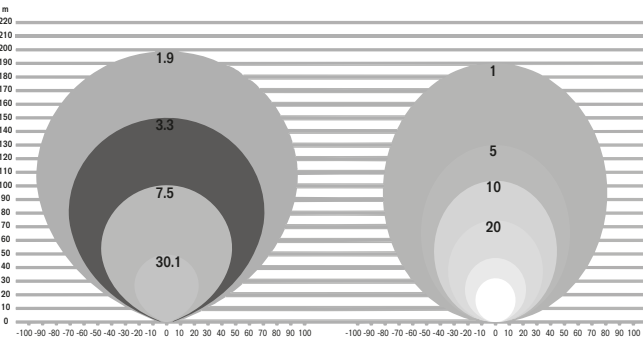

LED Lamp Power

- 4 x 400W vs 4 x 320W

Illuminated Area

- 10000 m² vs 6000 m²
- 67% increase in light coverage

Lumen output

- 224000 vs 192000 total lumens
- 16% increase in light brightness



40HQ : 19 UNITS

